


2M-1223C

RECHARGEABLE CAMCORDER SEALED LEAD-ACID BATTERY

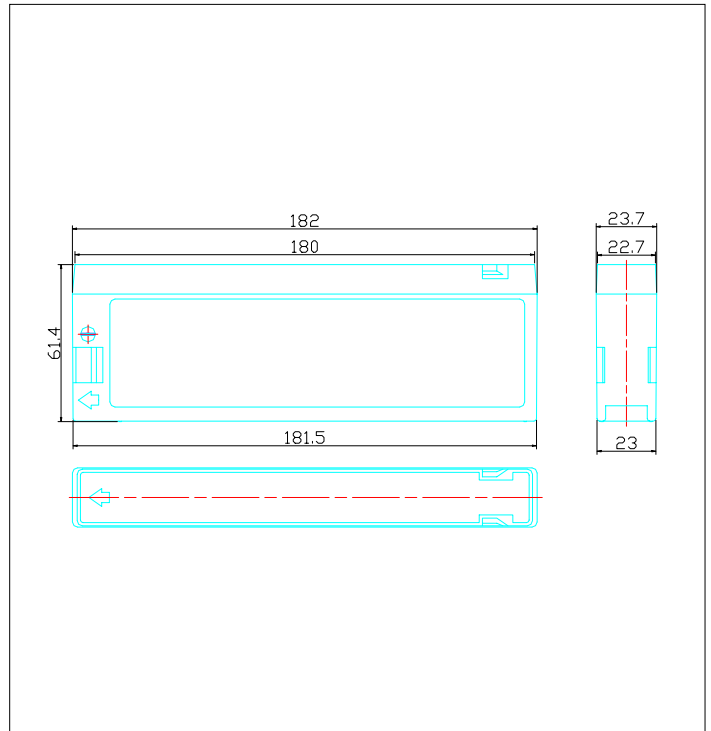

Specifications


Nominal voltage		12V
Rated Capacity (20 hour rate)		2.3Ah
Dimensions	Total height	2.4inches(61.4mm)
	Height	2.4inches(61.4mm)
	Length	7.17inches(182mm)
	Width	0.93inches(23.7mm)
Weight		Approx. 1.54Lbs(700g)

■ Characteristics

Capacity	20 hour rate	2.3Ah
	10 hour rate	2.0Ah
	5 hour rate	1.7Ah
	1 hour rate	1.5Ah
77°F(25°C)		
Internal Resistance	Full charged Battery 77°F(25°C)	110mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12 month storage	60%
Charge (Constant Voltage)	Cycle	Initial Charging Current less then 0.46A Voltage 14.5~14.9V/12V 77°F(25°C)
	Float	Voltage 13.5~13.8V/12V 77°F(25°C)

* The above data are average values and can be obtained within

■ Discharge Current & Discharge Duration Time 77°F(25°C)

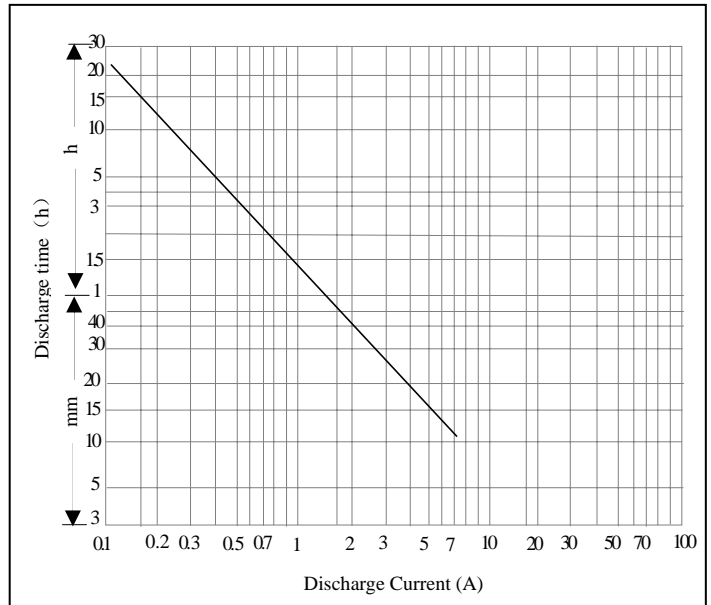

■ Discharge curves 77°F(25°C)

